


PAPH davit

Our PAPH series is an anti-pendulation system with a fully integrated docking head.

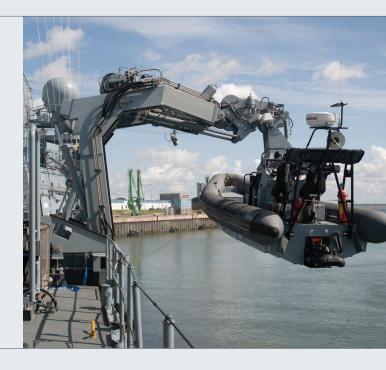

PAPH davit features


- Docking head
- Shock absorber
- Constant Tension System
- Wire puller
- Limit switch
- Remote control (wired or wireless)
- PLC control
- Linear sensor in cylinders

Optional features

- Winch Speed 40m/min
- Dead ship emergency lowering in accordance with Seismic Emergency Regulations
- Stainless steel fittings
- Control stand
- Control station
- Multi Keel Support
- Submerged HPU (or top mounted for outdoor placement)
- HPU stainless tank
- Soft starter
- Stainless steel starter for outdoor placement
- Metallization
- Enclosed Inspection Ladder
- Skid
- -40 degrees winterisation



PAPH davit

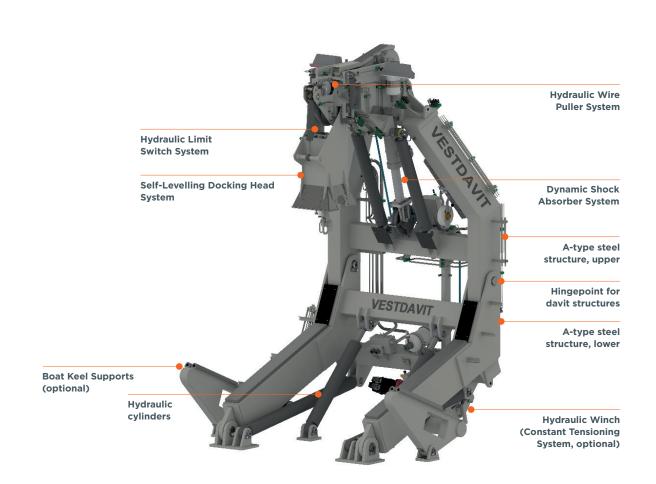

Model	MED Cert.	MWL	Total Travel (outreach)	Inst. Height, Stored Pos (mm)	Estimated Std Weight (kg)	Std. Max Hoist Speed (m/min)	Estimated Std Power Cons. (kW)	SOLAS	Opt. Max Hoist Speed (m/min)
PAPH-7000	Yes	7000	4805	4786	7600	0-36	86	Optional	0-60