


PLAR davit

The PLAR is a single point aluminum davit that delivers weight savings of 30% over an equivalent steel system, thereby reducing upper deck weight on the platform. The system is highly customizable.

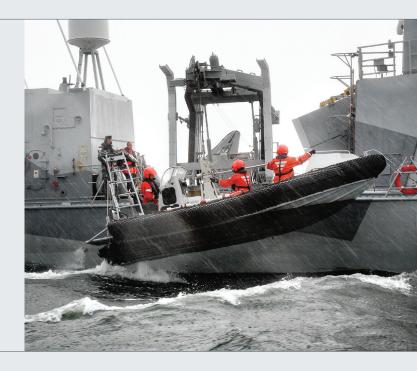

PLAR davit features


- Shock Absorber
- Standard Keel Support
- Metallization
- Hydraulic guiding arms
- Wire puller
- Limit switch

Optional features

- SOLAS
- Constant Tension System
- Stainless steel fittings
- Control stand
- Control station
- Submerged HPU (or top mounted for outdoor placement)
- HPU stainless steel tank
- Soft starter
- Stainless steel starter for outdoor placement
- Remote Control (wired or wireless)
- Skid
- Speed 50 m/min
- -40 degrees winterisation



PLAR davit

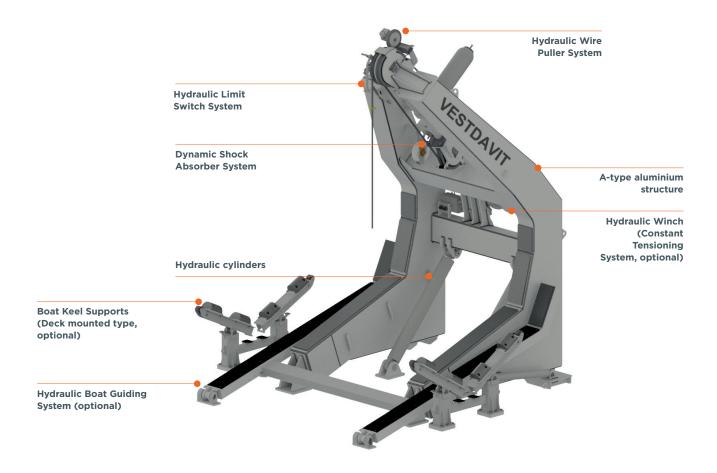

Model	MED Cert.	MWL	Total Travel (outreach)	Inst. Height, Stored Pos (mm)	Estimated Std Weight (kg)	Std. Max Hoist Speed (m/min)	Estimated Std Power Cons. (kW)	SOLAS	Opt. Max Hoist Speed (m/min)
PLAR-3600	Yes	3600	3466	4324	2000	0-36	43	Yes	0-60
PLAR-4501	Yes	4500	3411	4204	2300	0-36	55	Yes	0-60
PLAR-6501	Yes	6500	3752	4588	3200	0-36	74	Optional	0-60