

PL davit

The popular PL Series is highly customizable and suitable for both civilian and military applications. The series is Vestdavit's most compact and can be transported within a standard 20 foot ISO container, reducing delivery time and cost.




PL davit features

- Shock Absorber
- SOLAS
- Standard Keel Support

Optional features

- Constant Tension System
- Stainless steel fittings
- Control stand
- Control station
- Submerged HPU (or top mounted for outdoor placement)
- HPU stainless tank
- Soft starter
- Stainless steel starter for outdoor placement
- Metallization
- Remote Control (wired or wireless)
- Skid
- Hydraulic Guiding arms
- Wire puller
- Limit switch
- Upgraded Winch Speed
- -40 degrees winterisation

PL davit

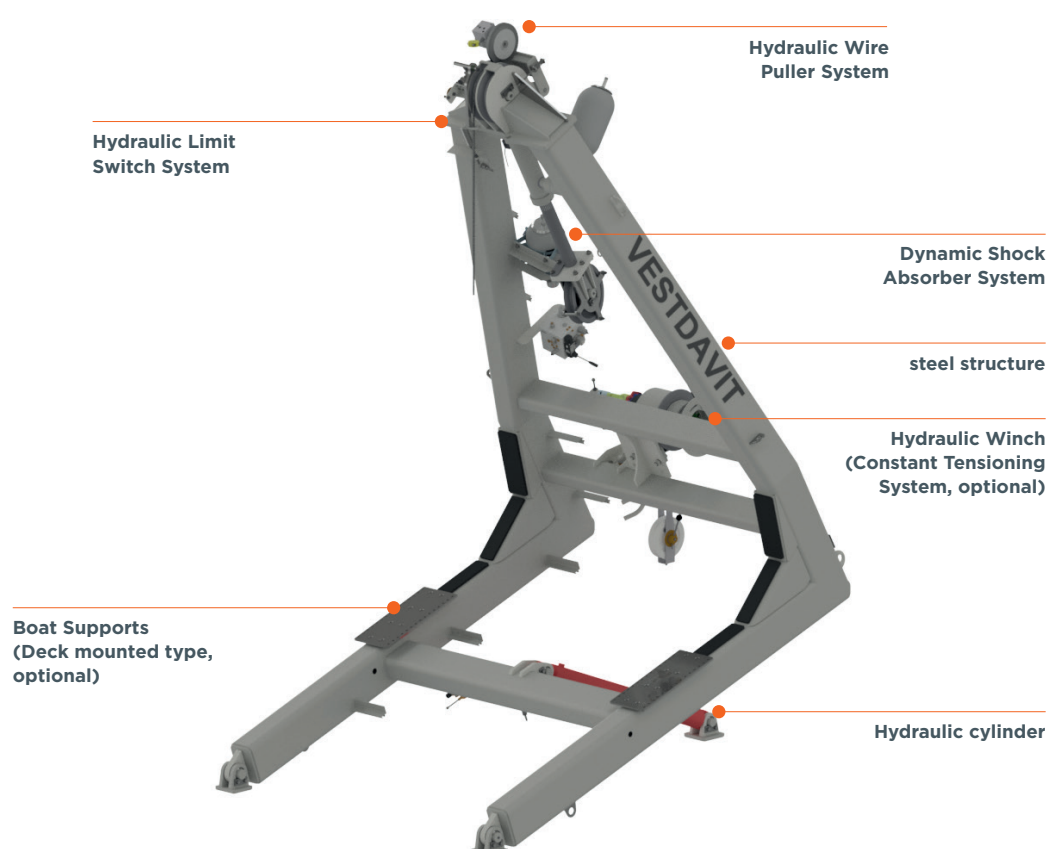

Model	MED Cert.	MWL	Total Travel (outreach)	Inst. Height, Stored Pos (mm)	Estimated Std Weight (kg)	Std. Max Hoist Speed (m/min)	Estimated Std Power Cons. (kW)	SOLAS	Opt. Max Hoist Speed (m/min)
PL-1500	Yes	1500	2788	3354	1150	0-36	21	Yes	0-50
PL-2501	Yes	2500	3245	4584	2150	0-36	31	Yes	0-50
PL-3600R	Yes	3600	3778	4598	2600	0-36	43	Yes	0-60