

PLA davit

Vestdavit PLA series is a fully hydraulically operated single-point aluminum A-frame davit.




PLA davit features

- Shock Absorber
- Standard Keel Support
- Metallization
- Hydraulic guiding arms
- Wire puller
- Limit switch

Optional features

- SOLAS
- Constant Tension System
- Stainless steel fittings
- Control stand
- Control station
- Submerged HPU (or top mounted for outdoor placement)
- HPU stainless steel tank
- Soft starter
- Stainless steel starter for outdoor placement
- Remote Control (wired or wireless)
- Skid
- Speed 50 m/min
- -40 degrees winterisation

PLA davit

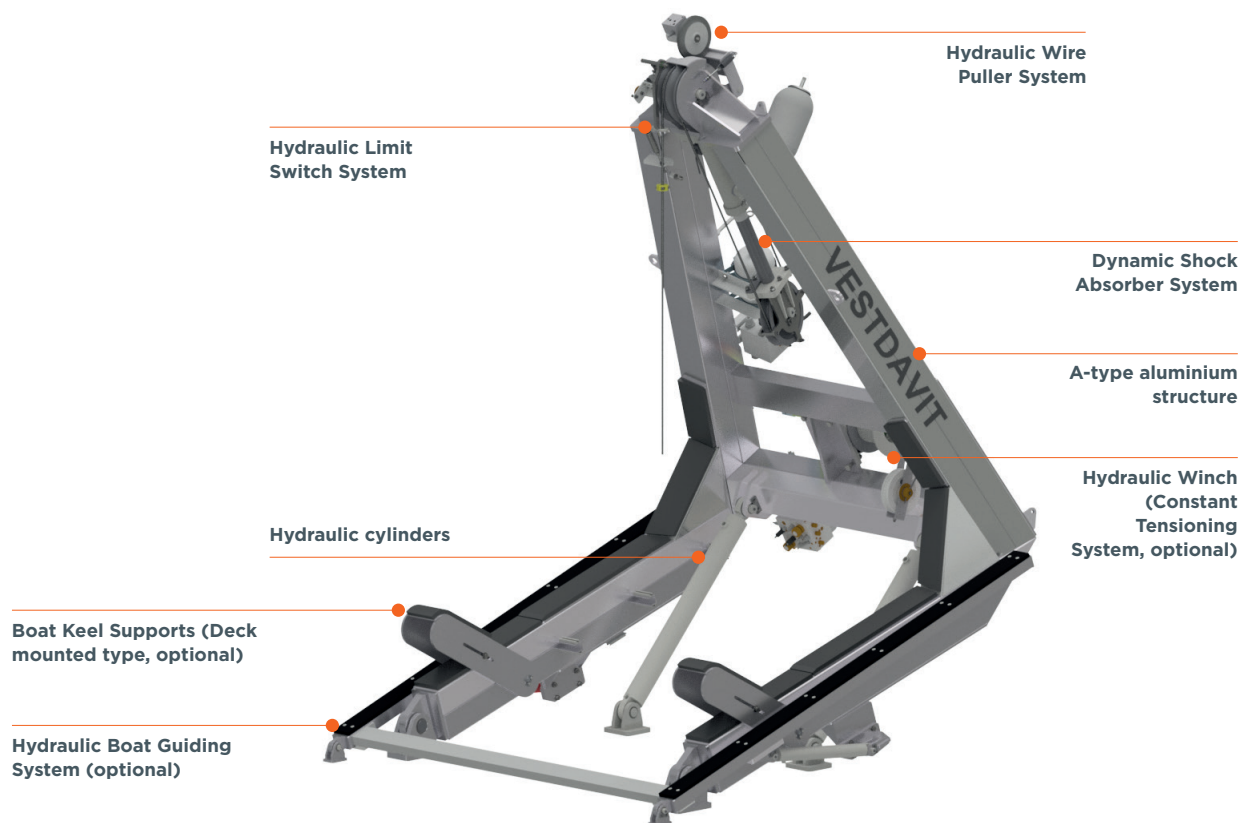

| Model | MED Cert. | MWL | Total Travel (outreach) | Inst. Height, Stored Pos (mm) | Estimated Std Weight (kg) | Std. Max Hoist Speed (m/min) | Estimated Std Power Cons. (kW) | SOLAS | Opt. Max Hoist Speed (m/min) |
|----------|-----------|------|-------------------------|-------------------------------|---------------------------|------------------------------|--------------------------------|-------|------------------------------|
| PLA-2500 | Yes | 2500 | 2996 | 4095 | 1750 | 0-36 | 31 | Yes | 0-40 |