

PLD davit

The PLD series is a modular and highly customizable system with a large weight range. The modular design allows the user to remote and replace components easily, thereby saving time and cost. The PLD series can be equipped fully removable with a triaxially compensated docking head for anti-pendulation.




PLD davit features

- Standard Keel Support
- Wire puller/
- Limit switch
- Shock absorber

Optional features

- Upgraded Winch Speed
- Docking head
- SOLAS
- Constant Tension System
- Stainless steel fittings
- Control stand
- Control station
- Submerged HPU (or top mounted for outdoor placement)
- HPU stainless tank
- Soft starter
- Stainless steel starter for outdoor placement
- Metallization
- Enclosed Inspection Ladder
- Remote Control (wired or wireless)
- Skid
- Hydraulic Guiding arms
- -40 degrees winterisation

PLD davit

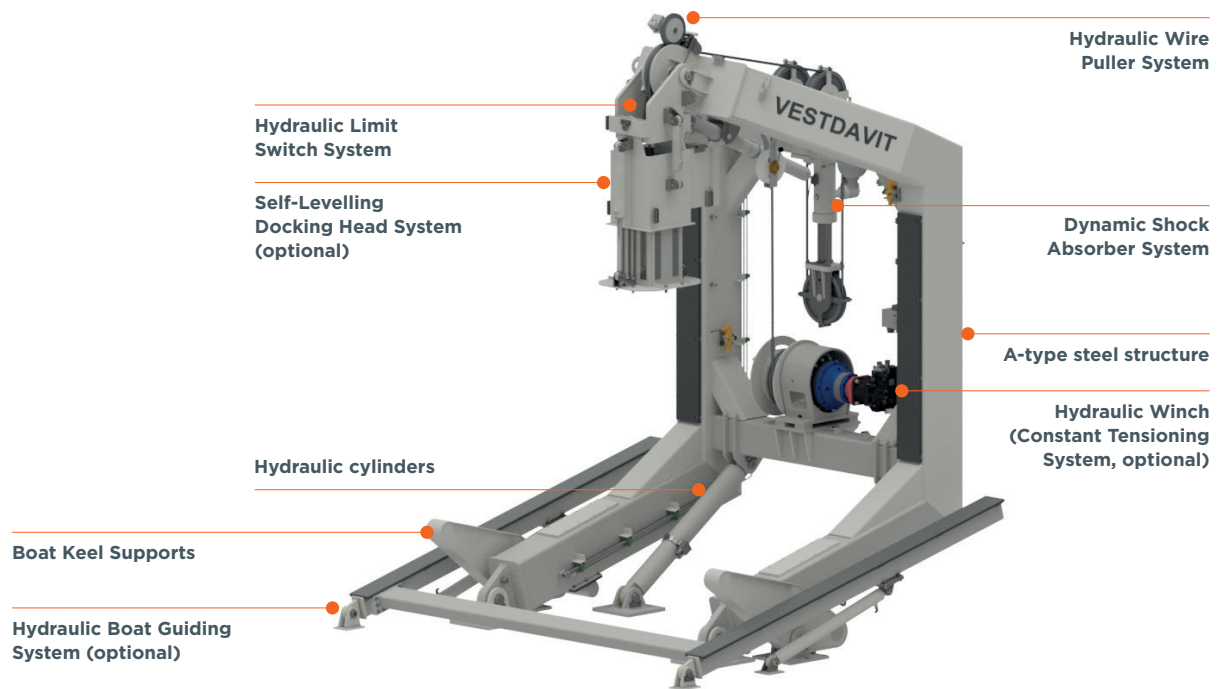

Model	MED Cert.	MWL	Total Travel (outreach)	Inst. Height, Stored Pos (mm)	Estimated Std Weight (kg)	Std. Max Hoist Speed (m/min)	Estimated Std Power Cons. (kW)	SOLAS	Opt. Max Hoist Speed (m/min)
PLD-4000	Yes	4000	3928	4796	4150	0-36	50	Optional	0-60
PLD-5000	Yes	5000	3975	4591	4150	0-36	59	Optional	0-60
PLD-6000	Yes	6000	3928	4556	4700	0-36	70	Optional	0-60
PLD-6002	Yes	6000	4359	4969	4900	0-36	70	Optional	0-60
PLD-9000	Yes	9000	5734	6628	8850	0-36	110	Optional	0-40
PLD-12000	Yes	12000	5826	7704	-	0-30	118	Optional	0-40
PLD-12001*	Yes	12000	6916	8481	14000	0-30	118	No	0-40
PLD-15001*	No	15000	5827	8620	18000	0-30	160	No	0-40
PLD-16000	No	15000	6097	7711	15880	0-30	172	No	0-40
PLD-16001*	No	16000	5826	8977	-	0-30	172	No	0-40

*Designed to accomodate extra wide catamaran crafts